



| RTR SPECIFICATIONS:       |  |
|---------------------------|--|
| ENVIRONMENTAL (OPERATING) | 50°F to 122°F (10°C to 50°C), 5% to 95% R.H.(NON-CONDENSING) |
| INPUT POWER               | 24 VAC +/- 10%, 6 VA, CLASS 2                                |
| INDICATORS                | STATUS LEDs  |
| MOUNT                     | STANDARD TS-35 DINRAIL MOUNT                                 |
| COMMUNICATION PROTOCOL    | BACNET MS/TP, BACNET IP (DEFAULT IP ADDRESS: 192.168.97.60)  |
| COMMUNICATION SPEED       | 9600, 19200, 38400, 76800                                    |

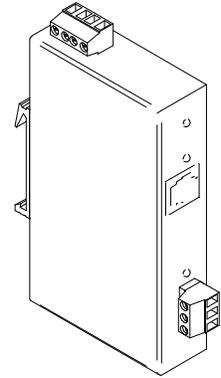


**DIMENSIONS:**

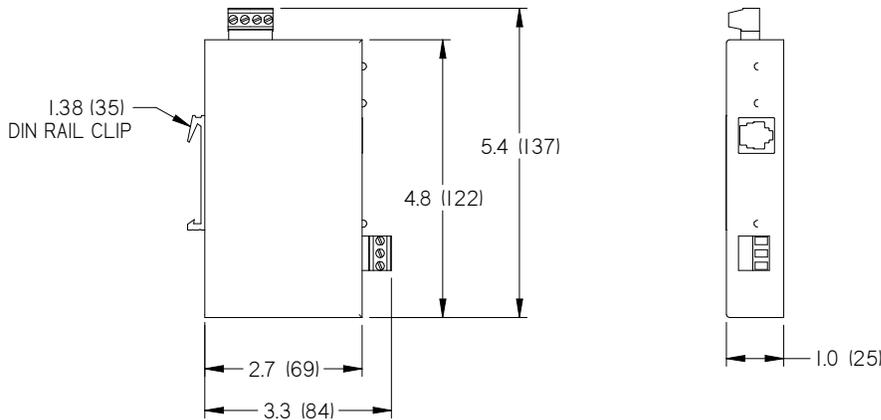

**MOUNT OPTIONS:**

- SHIPPED LOOSE (DEFAULT)
- PANEL MOUNTED (PM)

**TERMINATION:**

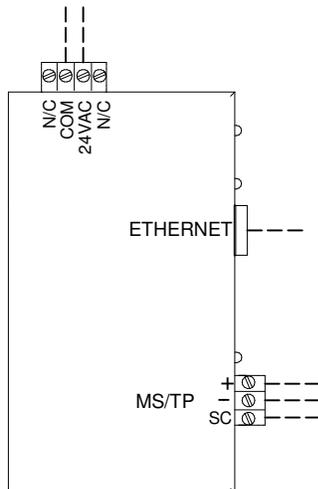

|          |  |
|----------|--|
| 24VAC    | INPUT POWER, HOT                             |
| COM      | INPUT POWER, GROUND                          |
| ETHERNET | IP CONNECTION<br>CONNECT TO BUILDING NETWORK |
| MS/TP +  | NET +  |
| MS/TP -  | NET -  |
| MS/TP SC | NET COM                                      |

NOTE: PLEASE REFER TO MANUAL FOR INSTALLATION AND SETUP INSTRUCTIONS.  
SEE PROJECT SUBMITTAL SCHEDULE FOR SELECTED OPTIONS.

ALL METRIC DIMENSIONS ( ) ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.  
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.